

DIAMOND V05

Millenium Series




TECHNICAL SPECIFICATIONS

- Dimensions:** 55 - 58 cm seat centres
73.5 cm depth
100 cm + 13 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Fixed in open position, anchored to the side panel by means of steel plates.
Polyurethane density 65 Kg/m³
- Side panel:** Texturized injected polypropylene, 40mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder.
- Volume:** 0.18 m³ / unit
- Weight:** 20.70 Kg not assembled


DIAMOND V05

Millenium Series

DIMENSIONS AND DRAWING

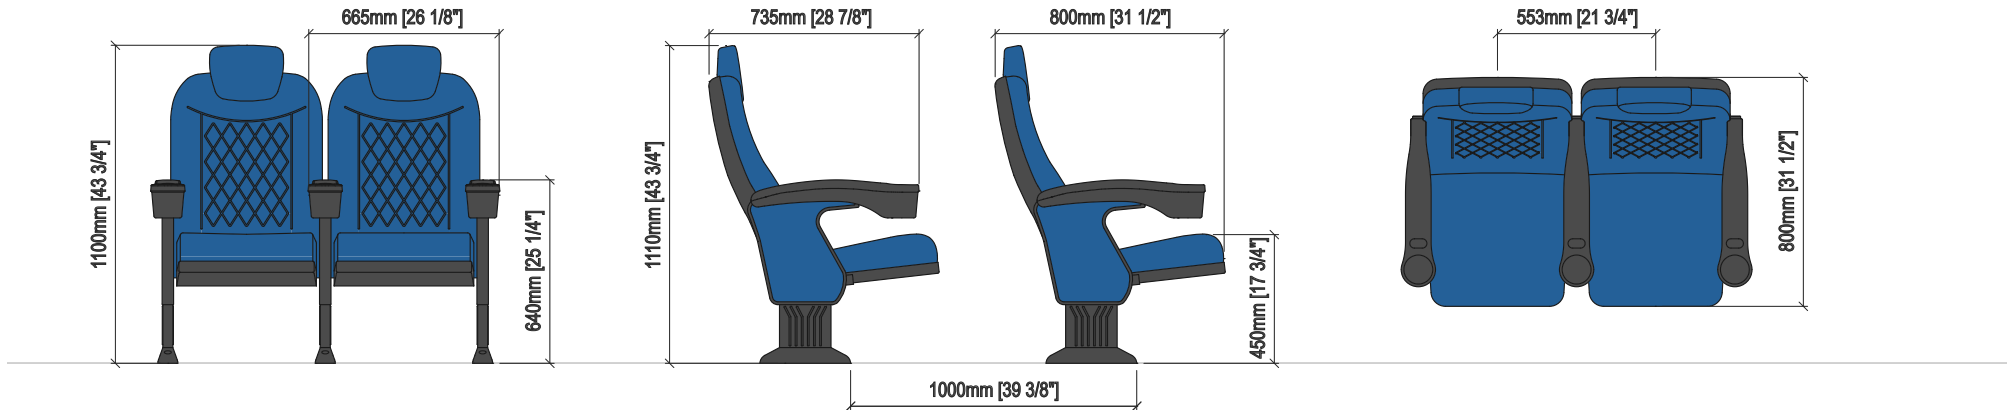

OPTIONS

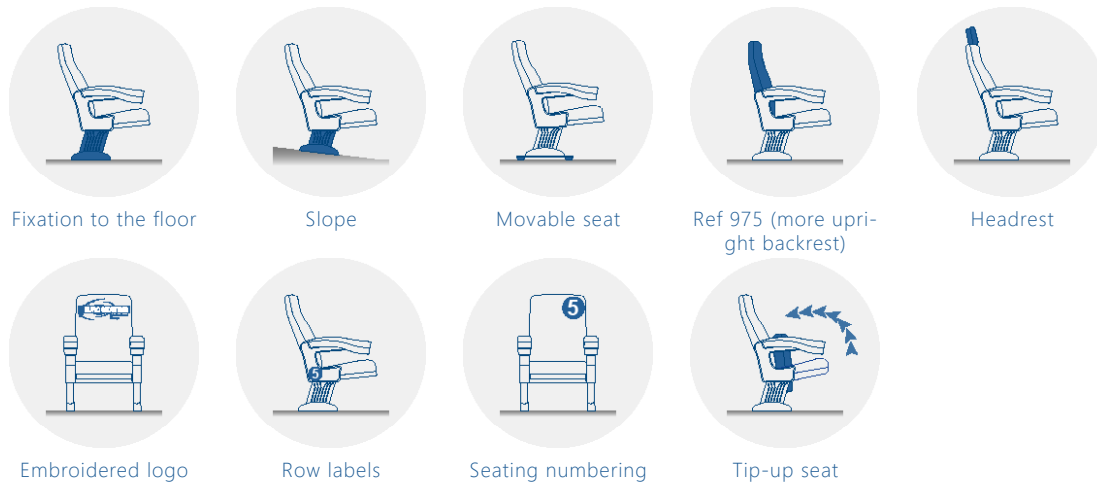

CERTIFICATES

	Fabric	Fire Barrier	Foam
BS 5852:2006	●		
BS-EN 1021-1:2006	●		
CAL TB 117-2013, SECTION 1	●		
UNE 23.727-90 1R (M1)	●	●	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●
BS 5852:1979 Parte 1		●	



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev