

# ROMA COMFORT V09 H

Millenium Series



## TECHNICAL SPECIFICATIONS

**Dimensiones:** 58 - 63 cm seat centres  
81 cm depth  
100 + 10 cm height

**Respaldo:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
Optional headrest with seat shell.  
Polyurethane density 55 Kg/m<sup>3</sup>

**Asiento:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
Fixed in open position, anchored to the side panel by means of steel plates.  
Polyurethane density 65 Kg/m<sup>3</sup>

**Costado:** Texturized injected polypropylene, 80mm  
End row panels completely upholstered.  
Concealed floor fixation system.

**Brazo:** Texturized injected polypropylene, including integrated cupholder.


**Volumen:** 0.21 m<sup>3</sup> / unit

**Peso:** 20.30 Kg not assembled


# ROMA COMFORT V09 H

Millenium Series

## DIMENSIONS AND DRAWING

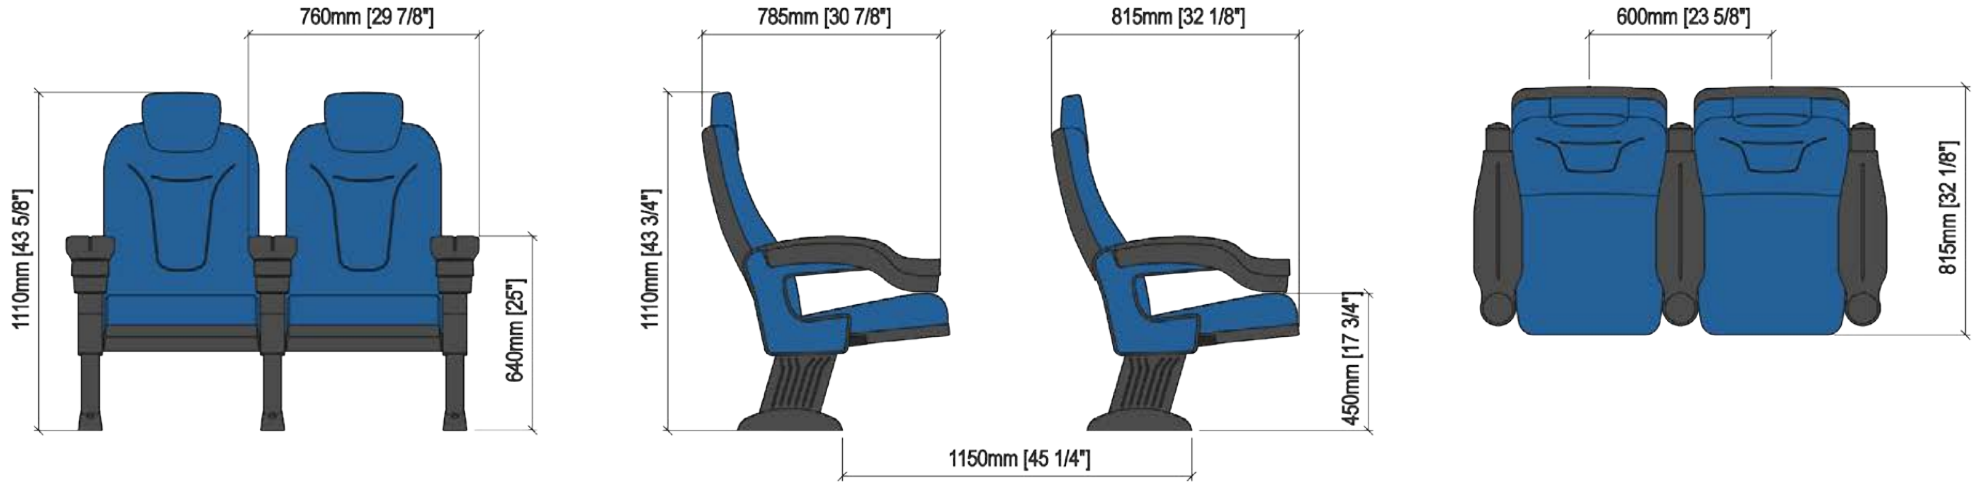

## OPCIONES

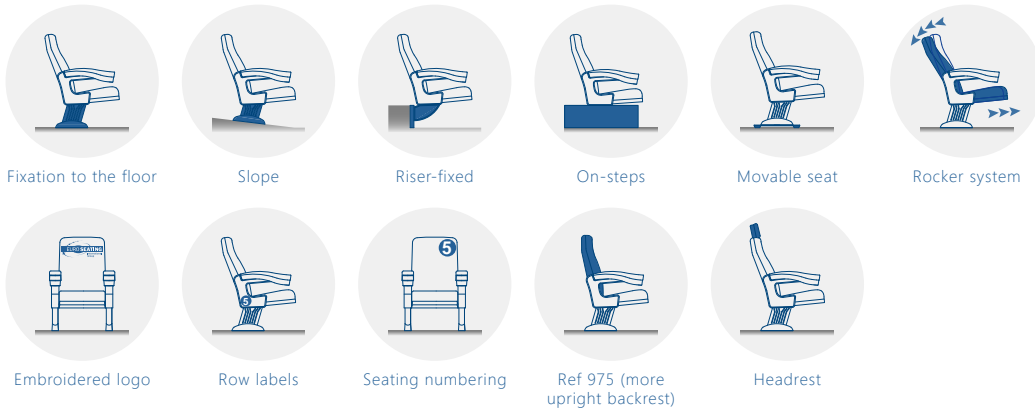


## CERTIFICATES

BS 5852:2006  
 BS-EN 1021-1:2006  
 CAL TB 117-2013, SECTION 1  
 UNE 23.727-90 1R (M1)  
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
 BS 5852:1979 Parte 1

	Fabric	Fire Barrier	Foam
BS 5852:2006	●		
BS-EN 1021-1:2006	●		
CAL TB 117-2013, SECTION 1	●		
UNE 23.727-90 1R (M1)	●	●	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●
BS 5852:1979 Parte 1		●	



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev