

TECHNICAL SPECIFICATIONS



Dimensions: 54 a 56 cm seat centres
51.5 cm depth
92 cm height

Backrest: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover.
Foam density, 40 Kg/m³

Seat: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block _upholstered by means of a fabric cover_ is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood.
Foam density, 40 Kg/m³

Side Panel: Wood fibres board, finish in beech.
Concealed floor fixation system by means of a steel plinth.

Armrest: Round-shaped varnished solid wood.


Volume: 0.100 m³ / unit

Weight: 15.50 Kg not assembled


AZAHAR

Studio Series

DRAWING

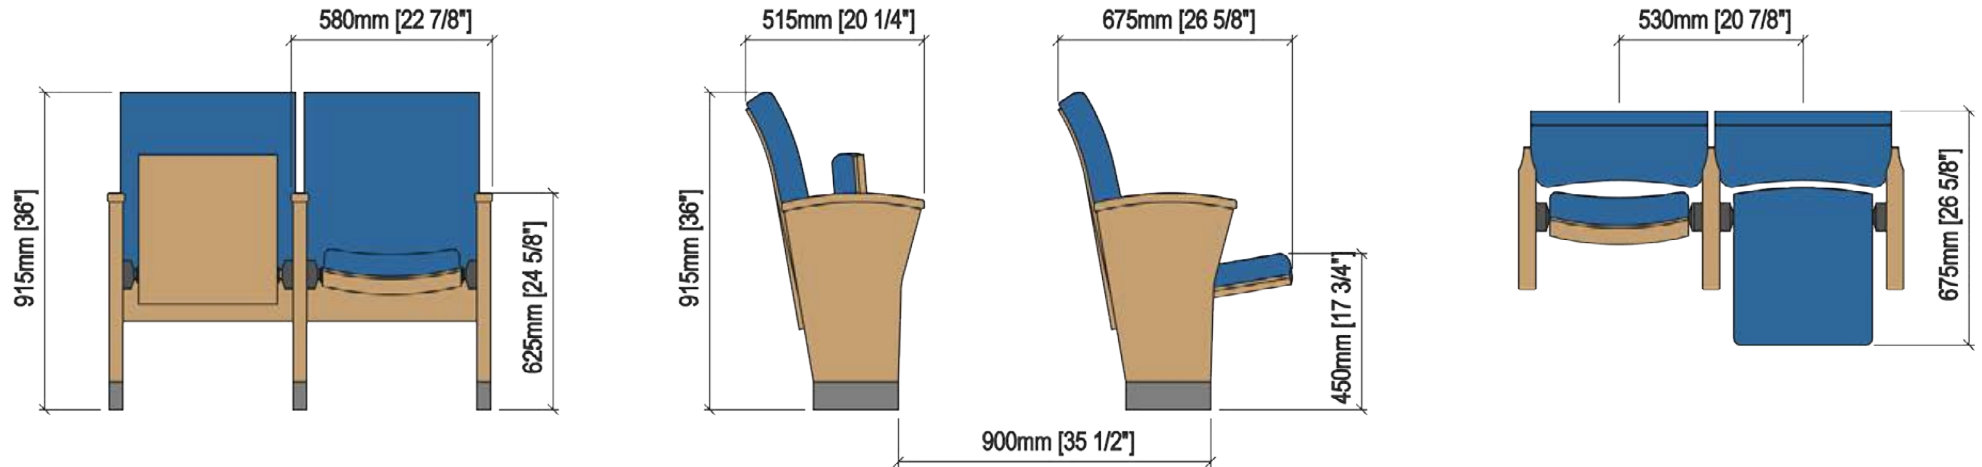

OPTIONS

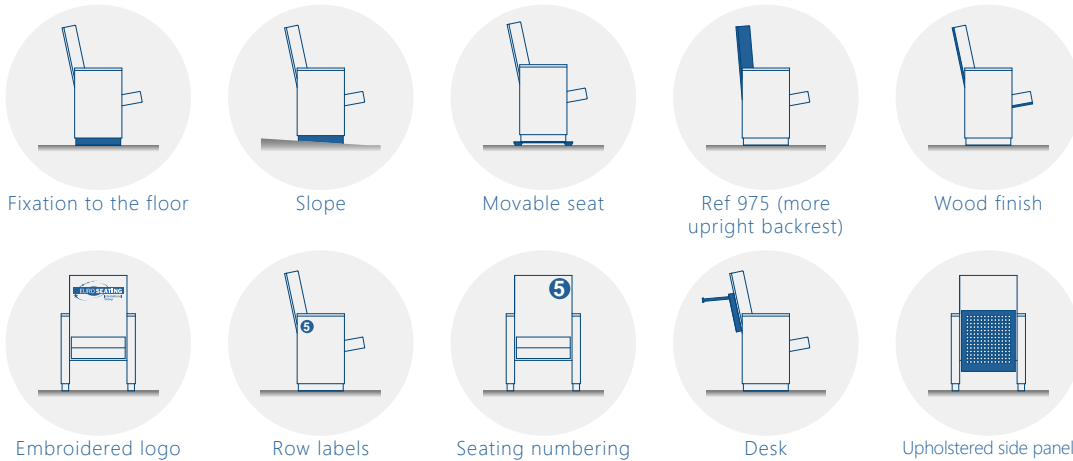

CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	●
	●		



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev