

TECHNICAL SPECIFICATIONS



Dimensions: 56 - 58 cm seat centres
38 cm depth
97 cm height

Backrest: Completely upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a beech solid wood frame with thin canvas strips. All this structure is protected by an upholstered wood cover.
Foam density, 40 Kg/m³

Seat: Fully upholstered by a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips.
When the seat unfolds, the backrest leans and raises, thus adopting a standard position, everything in a same single synchronized movement.
Foam density, 40 Kg/m³

Side Panel: Wood structure completely upholstered.
Concealed floor fixation system by means of a steel plinth.

Armrest: Included in the very side panel.

Volume: 0.140 m³ / unit


Weight: 23.50 Kg not assembled




BAKU

Studio Series

DRAWING

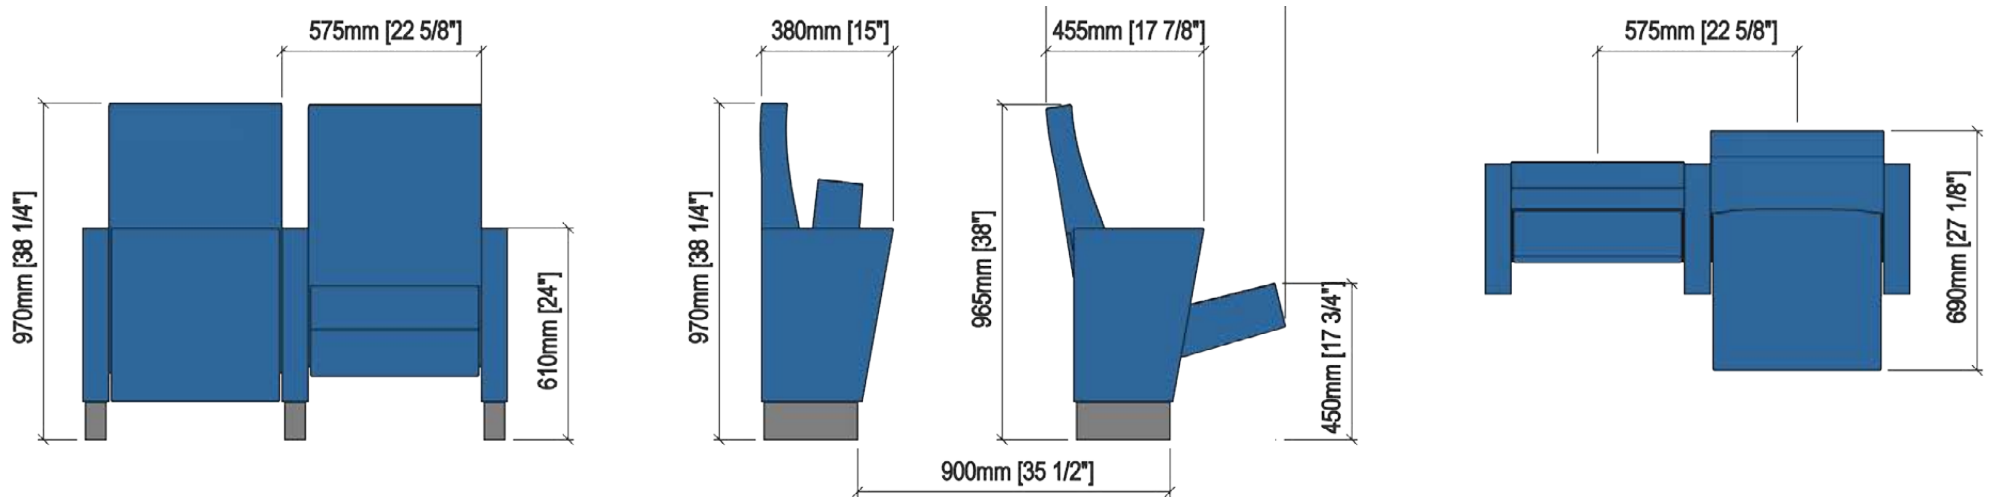

OPTIONS

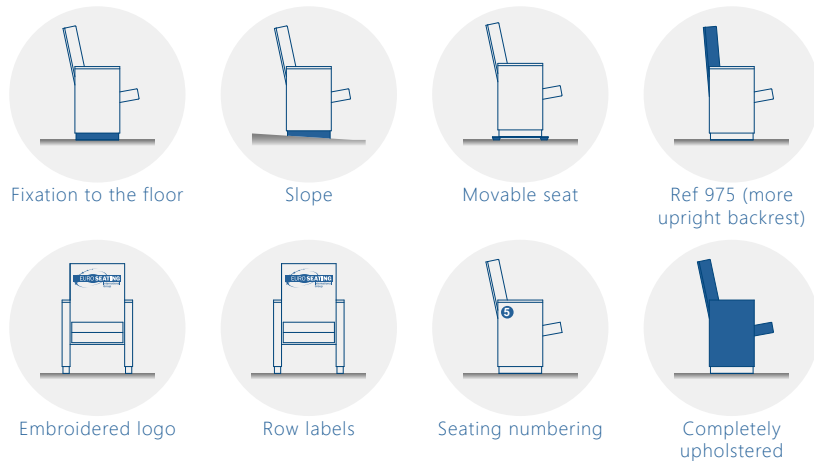

CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1

	Fabric	Fire barrier	Foam	Seat
BS 5852:2006	●			
BS-EN 1021-1:2006	●			
CAL TB 117-2013, SECTION 1	●			
UNE 23.727-90 1R (M1)	●	●		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●	●
BS 5852:1979 Parte 1		●		



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev