




## TECHNICAL SPECIFICATIONS

- Dimensions:** 54 a 56 cm seat centres  
53 cm depth  
98 cm height
- Backrest:** Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover.  
Foam density, 40 Kg/m<sup>3</sup>
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.  
Polyurethane density 65 Kg/m<sup>3</sup>
- Side Panel:** Round-shaped varnished solid wood.  
Concealed floor fixation system.
- Armrest:** Round-shaped varnished solid wood.
- Volume:** 0.160 m<sup>3</sup> / unit
- Weight:** 25.50 Kg not assembled


# BRETÓN

## Studio Series

### DRAWING

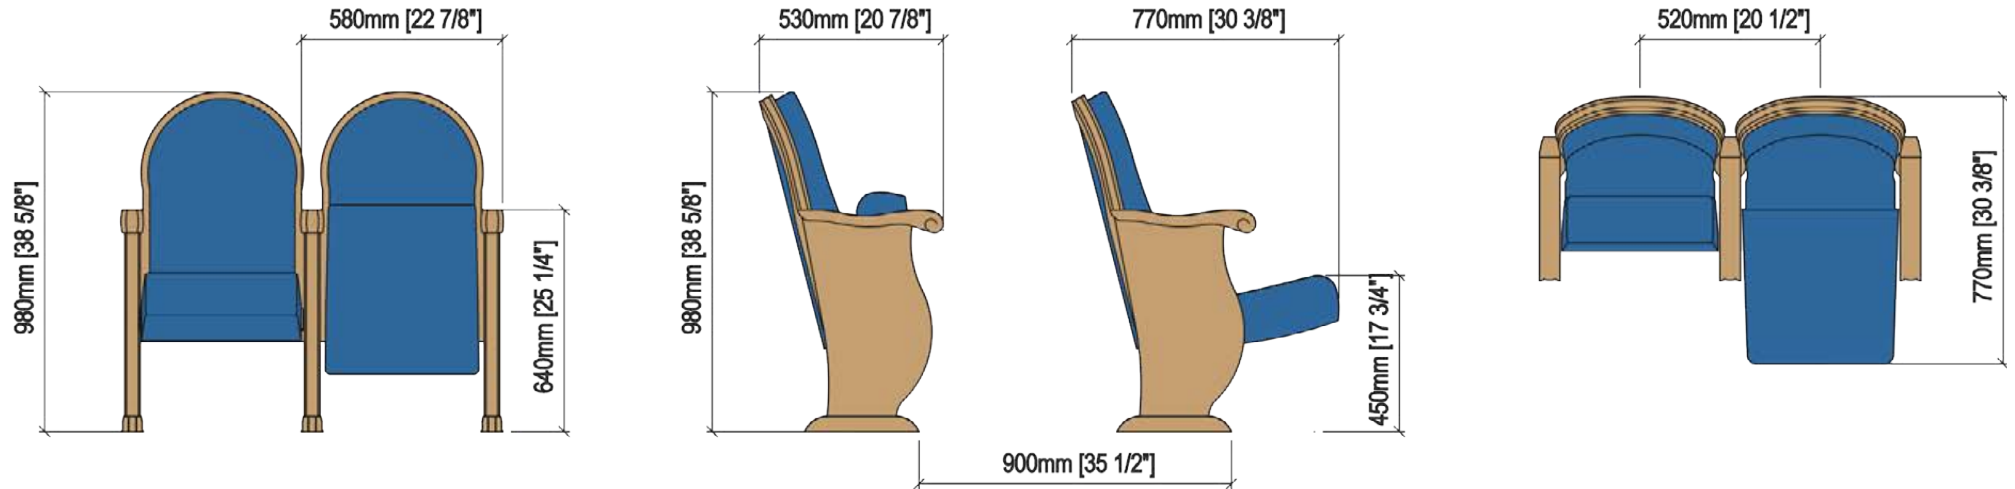

### OPTIONS

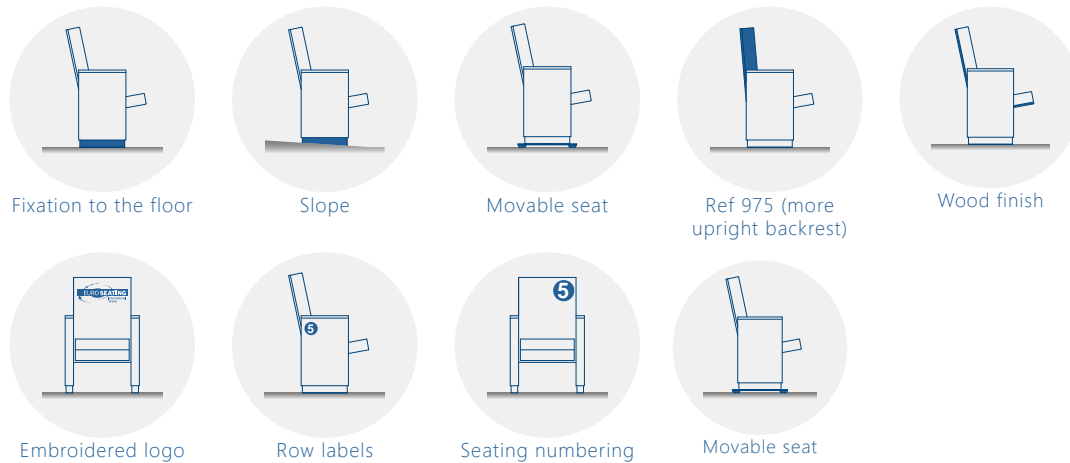

### CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

| Fabric | Fire barrier | Foam | Seat |
|--------|--------------|------|------|
| ●      |              |      |      |
| ●      |              |      |      |
| ●      |              |      |      |
| ●      | ●            |      |      |
| ●      | ●            | ●    | ●    |
|        | ●            |      |      |



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev