

# ECO 100

## Millenium Series



### TECHNICAL SPECIFICATIONS

**Dimensions:** 52 - 54 cm seat centres  
52 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
Polyurethane density 55 Kg/m<sup>3</sup>

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
The seat pan folds by means of an automatic noiseless maintenance-free double spring.  
Polyurethane density 65 Kg/m<sup>3</sup>

**Side panel:** Texturized injected polypropylene, 40mm  
End row panels completely upholstered  
Concealed floor fixation system.

**Armrest:** Rounded texturized injected polypropylene


**Volume:** 0.14 m<sup>3</sup> / unit

**Weight:** 16.80 Kg not assembled


# ECO 100

## Millenium Series

### DIMENSIONS AND DRAWING

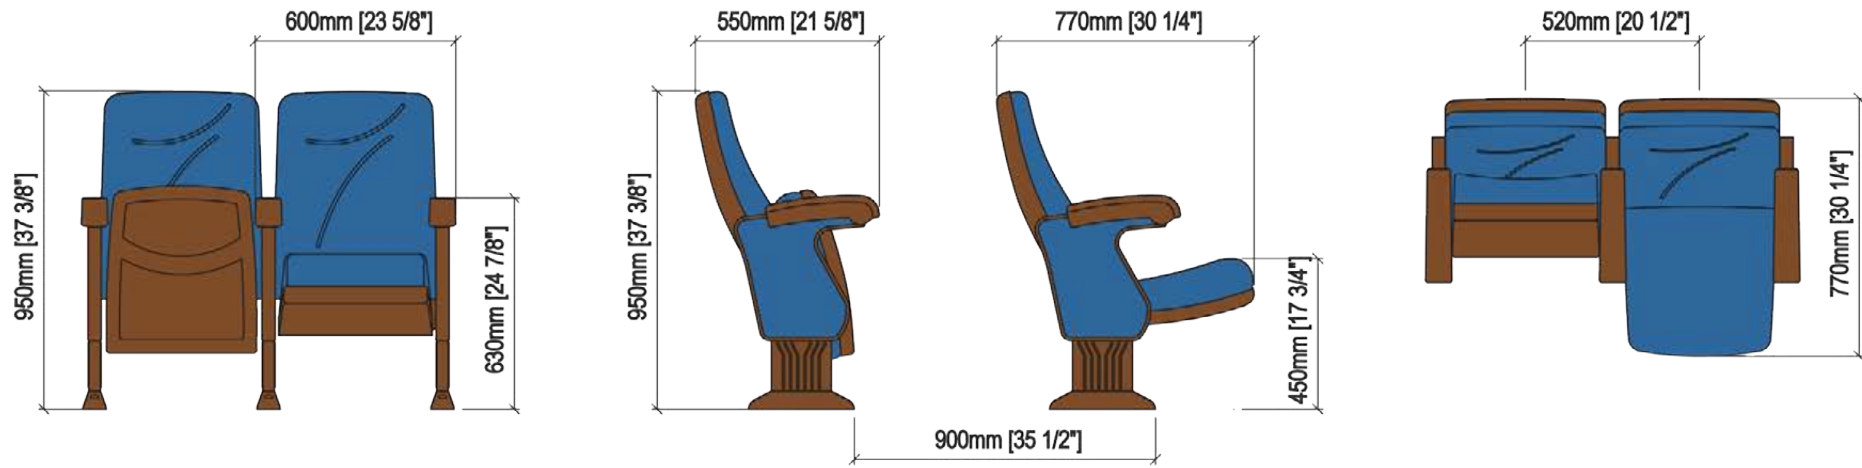

### OPTIONS

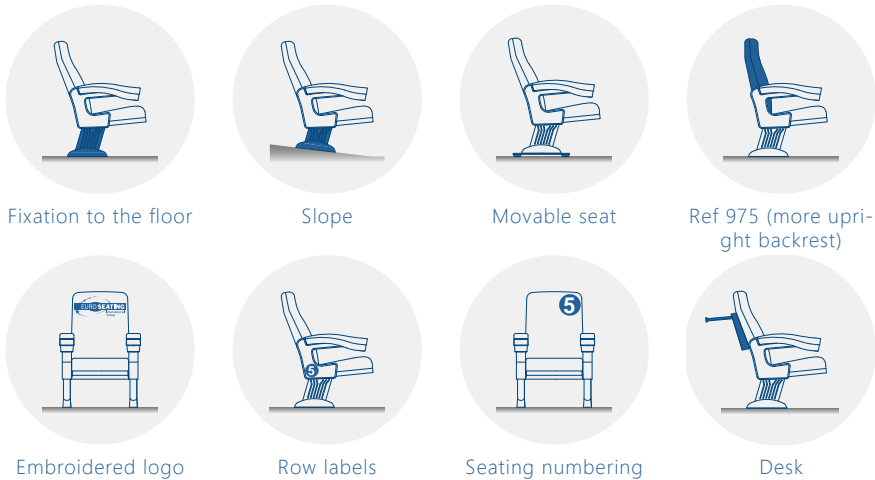

### CERTIFICATES

BS 5852:2006  
 BS-EN 1021-1:2006  
 CAL TB 117-2013, SECTION 1  
 UNE 23.727-90 1R (M1)  
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
 BS 5852:1979 Parte 1

	Fabric	Fire Barrier	Foam
BS 5852:2006	●		
BS-EN 1021-1:2006	●		
CAL TB 117-2013, SECTION 1	●		
UNE 23.727-90 1R (M1)	●	●	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●
BS 5852:1979 Parte 1		●	



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev