

# FUSHION

## Studio Series



## TECHNICAL SPECIFICATIONS

**Dimensions:** 57 - 58 cm seat centres  
56 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
Polyurethane density 55 Kg/m<sup>3</sup>

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.  
The seat pan folds by means of an automatic noiseless maintenance-free double spring.  
Polyurethane density 65 Kg/m<sup>3</sup>

**Side Panel:** Wood structure completely upholstered.  
Concealed floor fixation system by means of a steel plinth.

**Armrest:** Straight-shaped varnished solid wood.


**Volume:** 0.17 m<sup>3</sup> / unit

**Weight:** 23.50 Kg not assembled


# FUSHION

## Studio Series

### DRAWING

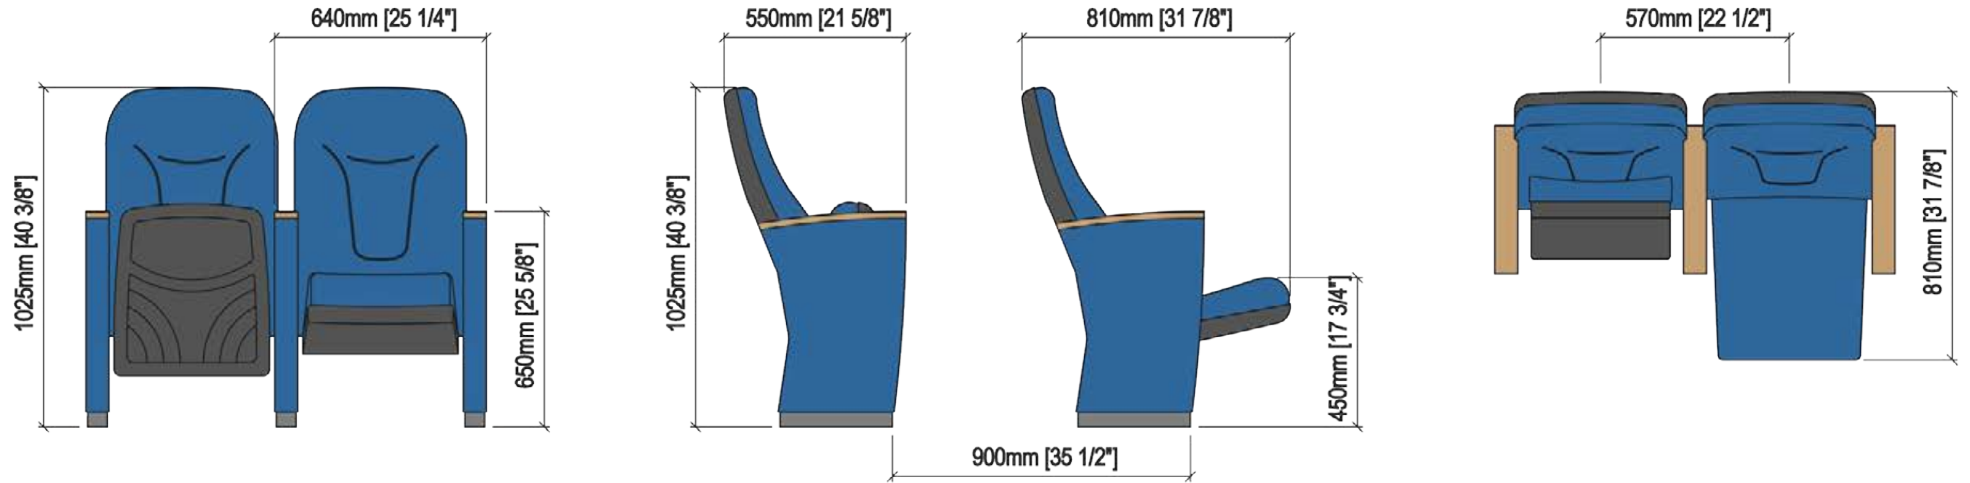

### OPTIONS

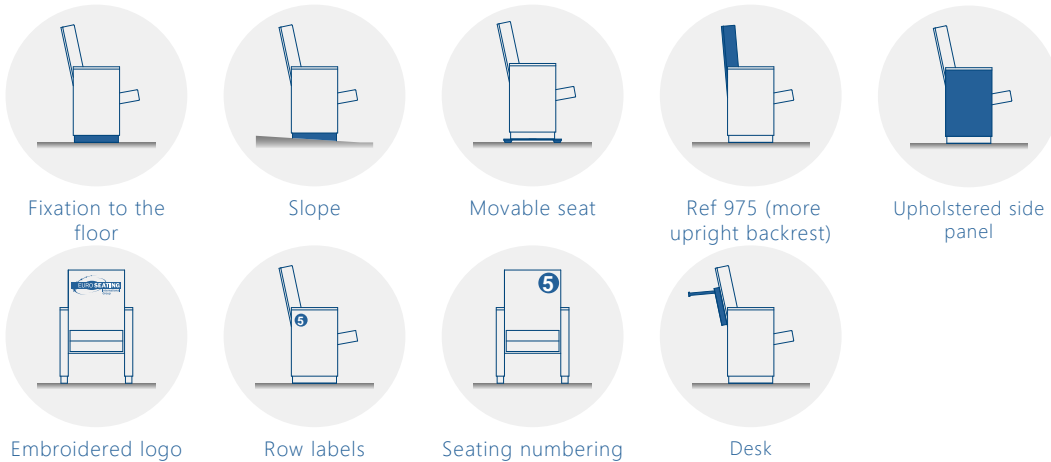

### CERTIFICATES

BS 5852:2006  
 BS-EN 1021-1:2006  
 CAL TB 117-2013, SECTION 1  
 UNE 23.727-90 1R (M1)  
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
 BS 5852:1979 Parte 1  
 COEFICIENTE DE ABSORCIÓN ACÚSTICA

	Fabric	Fire Barrier	Foam	Seat
BS 5852:2006	●			
BS-EN 1021-1:2006	●			
CAL TB 117-2013, SECTION 1	●			
UNE 23.727-90 1R (M1)	●	●		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●	
BS 5852:1979 Parte 1		●		
COEFICIENTE DE ABSORCIÓN ACÚSTICA				●



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev