

FUSHION PL

Studio Series

TECHNICAL SPECIFICATIONS



Dimensions: 52 - 54 cm seat centres
56 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³

Side panel: Wood structure completely upholstered.
Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel.
Concealed floor fixation system by means of a steel plinth.

Armrest: Straight-shaped varnished solid wood.

Volume: 0.17 m³ / unit


Weight: 23.50 Kg not assembled




FUSHION PL

Studio Series

DRAWING

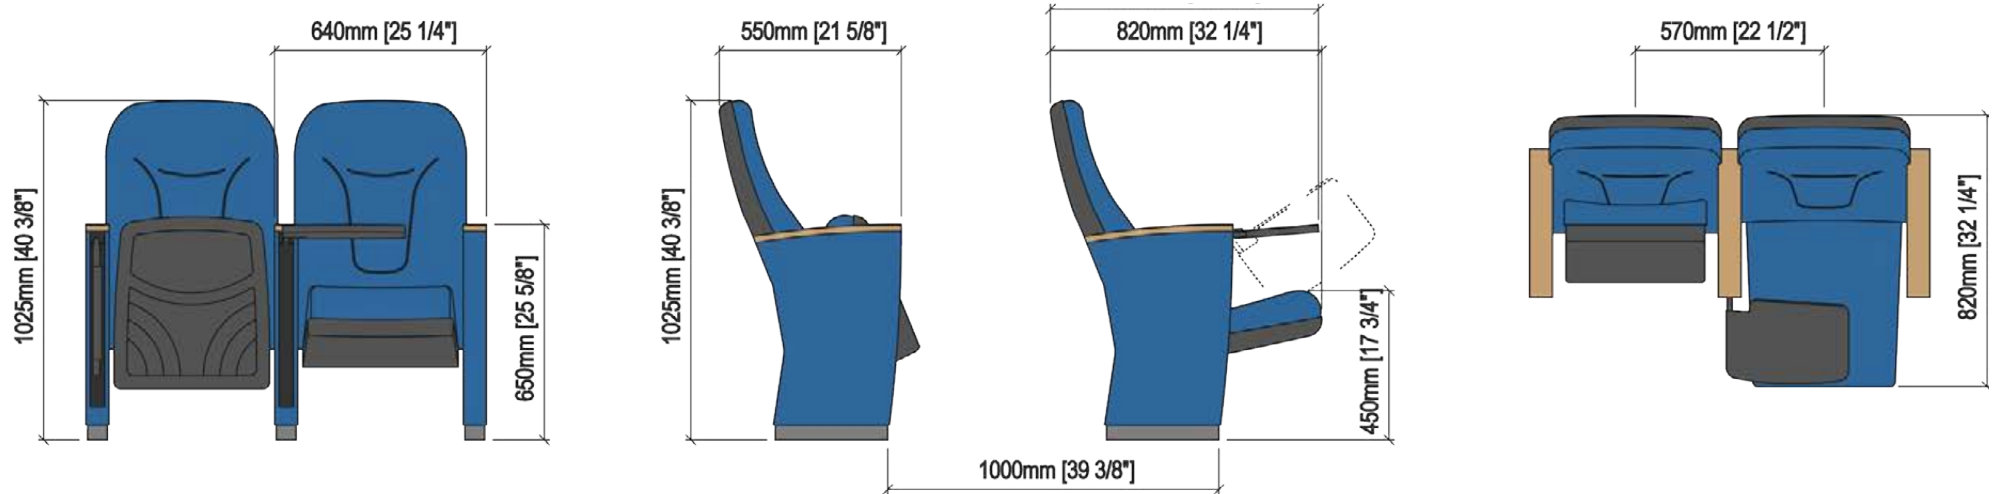

OPTIONS

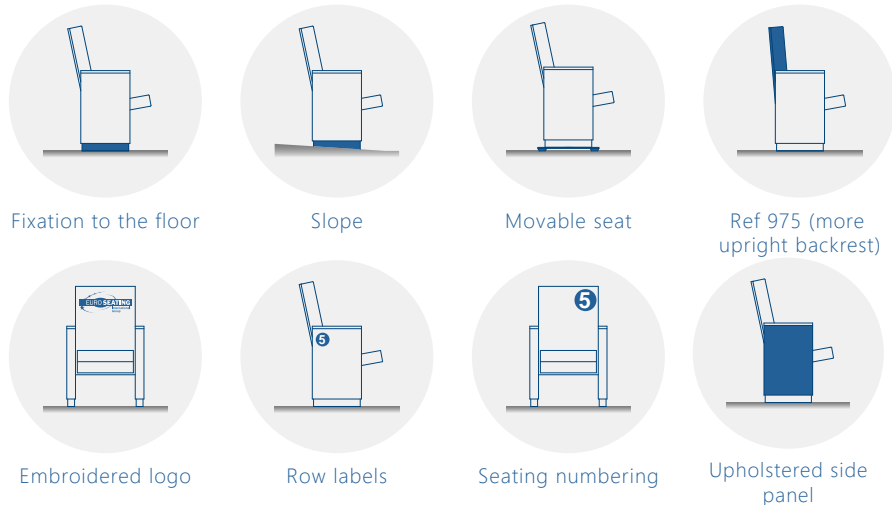

CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1
 COEFICIENTE DE ABSORCIÓN ACÚSTICA

Fabric	Fire Barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	
	●		
			●



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev