

GOYA

Studio Series



TECHNICAL SPECIFICATIONS

Dimensions: 52 a 54 cm seat centres
55.5 cm depth
95.5 cm height

Backrest: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block upholstered by means of a fabric cover is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood.
Polyurethane density 40 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³

Side Panel: Fibres wood board, finish in beech. Internal steel structure.
Concealed floor fixation system.

Armrest: Round-shaped varnished solid wood.


Volume: 0.140 m³ / unit

Weight: 18.90 Kg not assembled

GOYA

Studio Series

DRAWING

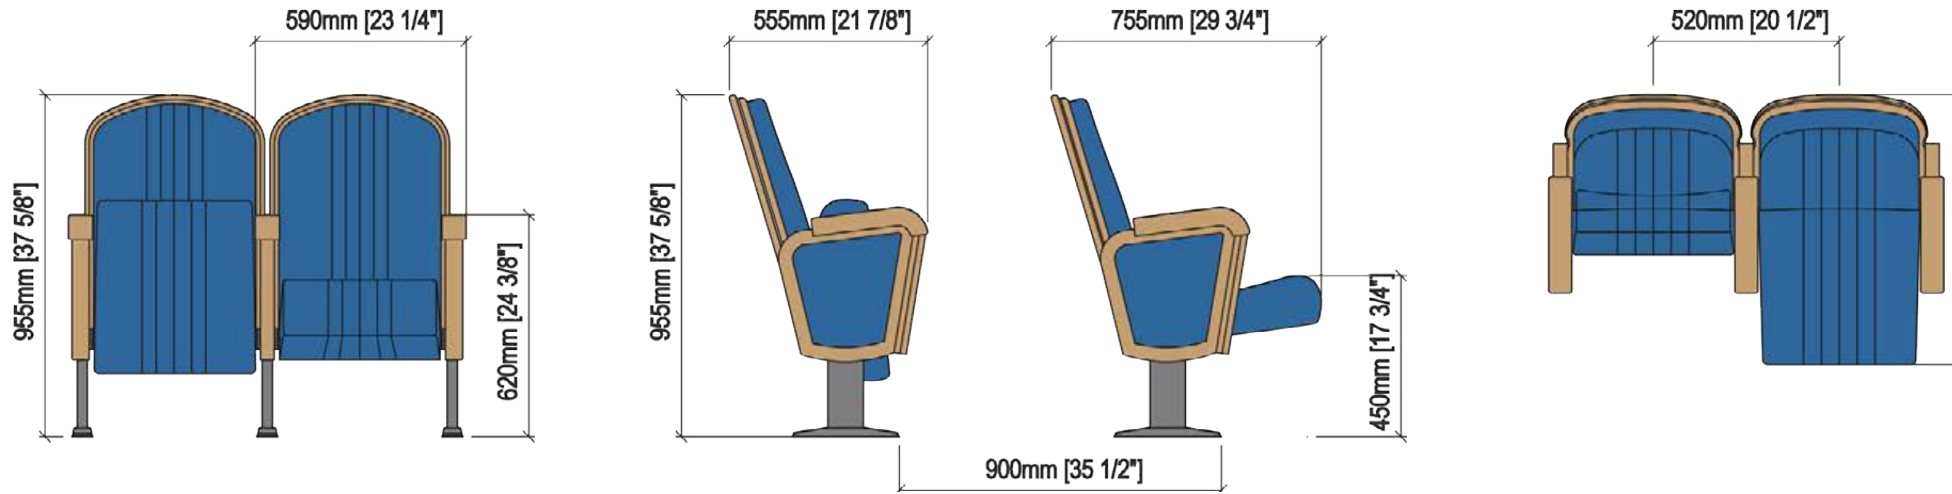

OPTIONS

Fixation to the floor	Slope	Movable seat	Ref 975 (more upright backrest)	Wood finish
Embroidered logo	Row labels	Seating numbering	Acoustical perforations	

CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	●
	●		



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev