

# LUGANO

## Studio Series



## TECHNICAL SPECIFICATIONS

**Dimensions:** 54 a 56 cm seat centres  
43 cm depth  
101 cm height

**Backrest:** Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover.  
Foam density, 40 Kg/m<sup>3</sup>

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which enfolds an injected polypropylene frame completely, later upholstered by means of a fabric cover. All this structure is protected by a compressed wood cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.  
Polyurethane density 65 Kg/m<sup>3</sup>

**Side Panel:** Wood fibres board, finish in beech.  
Concealed floor fixation system.

**Armrest:** Included in the very side panel.


**Volume:** 0.150 m<sup>3</sup> / unit

**Weight:** 22.65 Kg not assembled


# LUGANO

## Studio Series

### DRAWING

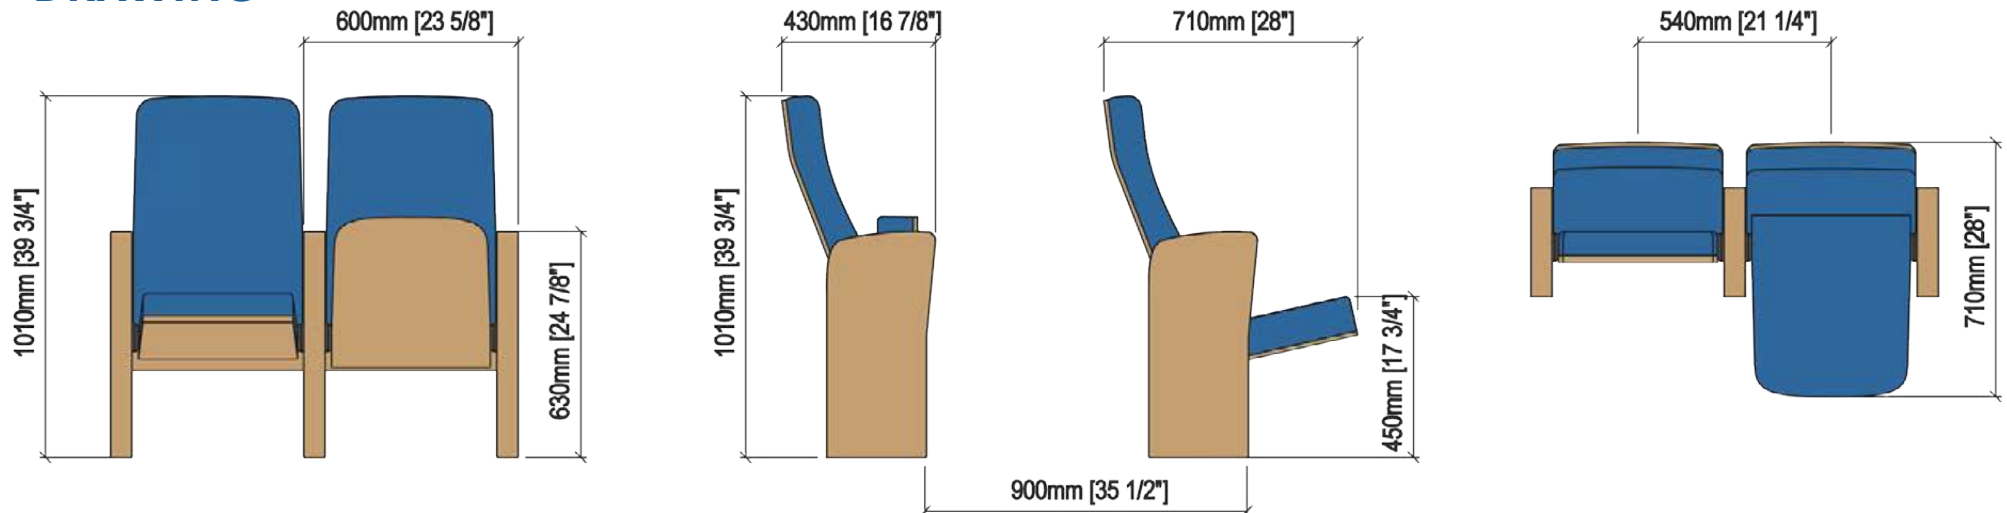

### OPTIONS

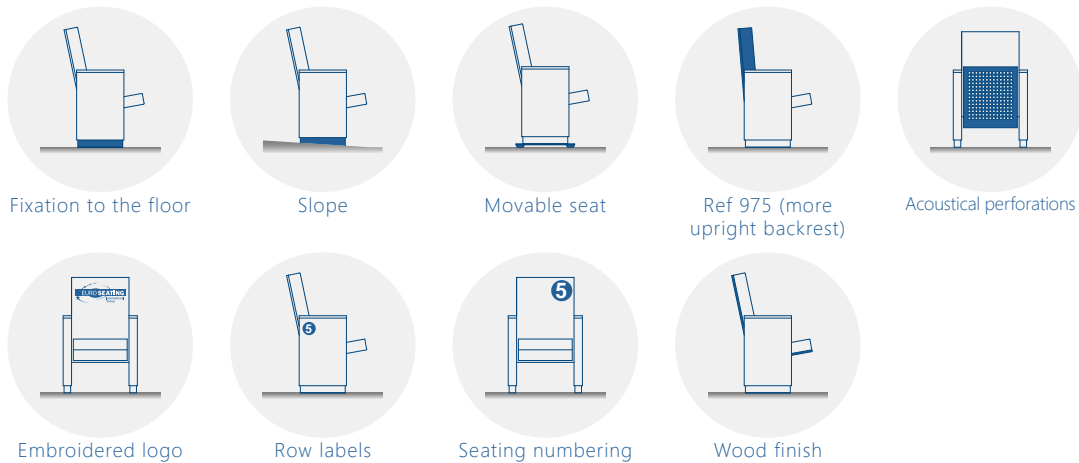

### CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	●
	●		



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev