

MICRA 500

Micra Series



TECHNICAL SPECIFICATIONS

Dimensions: 48 - 52 cm seat centres
53 cm depth
11 cm height

Backrest: Manufactured over a bowed roof-tile shaped MDF board, on which an open cell polyurethane foam block _upholstered by means of a fabric cover_ is fixed. All this structure is protected by a texturized injected polypropylene seat shell. No need of any spring for the folding of the backrest, thus achieving a precise, sound, reliable, noiseless and maintenance-free structure.
Foam density, 40 Kg/m³

Seat: Manufactured over a flat MDF board, on which an open cell polyurethane foam block _upholstered by means of a fabric cover_ is fixed. All this structure is protected by a texturized injected polypropylene seat shell. Fixed to the grandstand floor in a discreet way, thus keeping completely concealed from view.
Foam density, 40 Kg/m³

Side Panel: Tip-up folding system in carbon steel, finish in epoxy paint.

Armrest: Optionally in rounded texturized injected polypropylene.

Volume: 0.09 m³ / unit


Weight: 15.00 Kg not assembled




MICRA 500

Micra Series

DRAWING

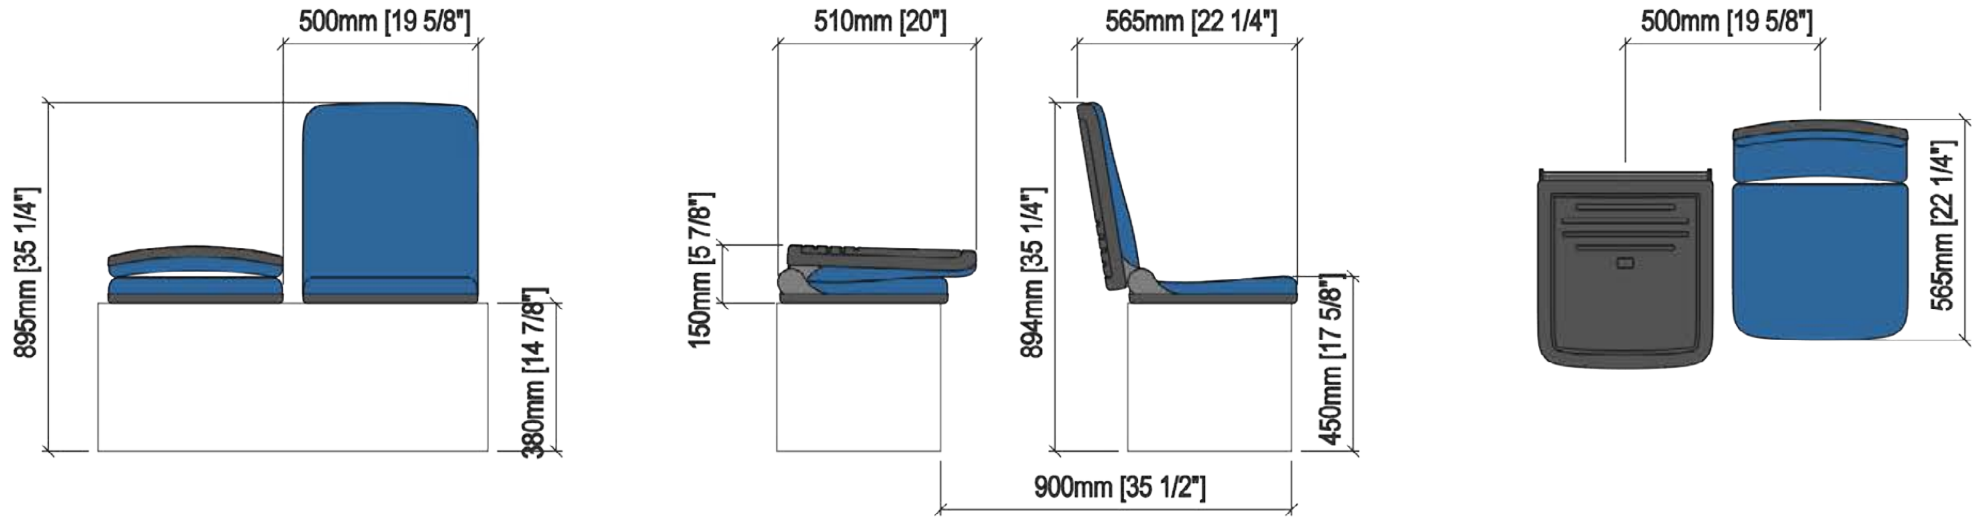

OPTIONS

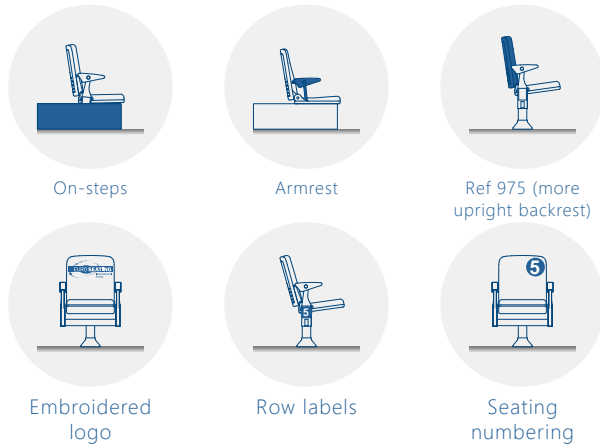

CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
●		
●		
●		
●	●	
●	●	●
	●	



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev