

MICRA TEK 500 PAD

Micra Series

TECHNICAL SPECIFICATIONS

Dimensions: 48 - 52 cm seat centres
58 cm depth
15.5 cm height

Backrest: Extrusion blow moulded in texturized high-density polyethylene.
Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover. No need of any spring for the folding of the backrest, thus achieving a precise, sound, reliable, noiseless and maintenance-free structure.
Foam density, 40 Kg/m³

Seat: Extrusion blow moulded in texturized high-density polyethylene.
Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover. Fixed to the grandstand floor in a discreet way, thus keeping completely concealed from view.
Foam density, 40 Kg/m³

Side Panel: Tip-up folding system in carbon steel, finish in epoxy paint.

Armrest: Optionally in rounded texturized injected polypropylene.

Volume: 0.09 m³ / unit

Weight: 16.50 Kg not assembled




MICRA TEK 500 PAD


Micra Series



DRAWING

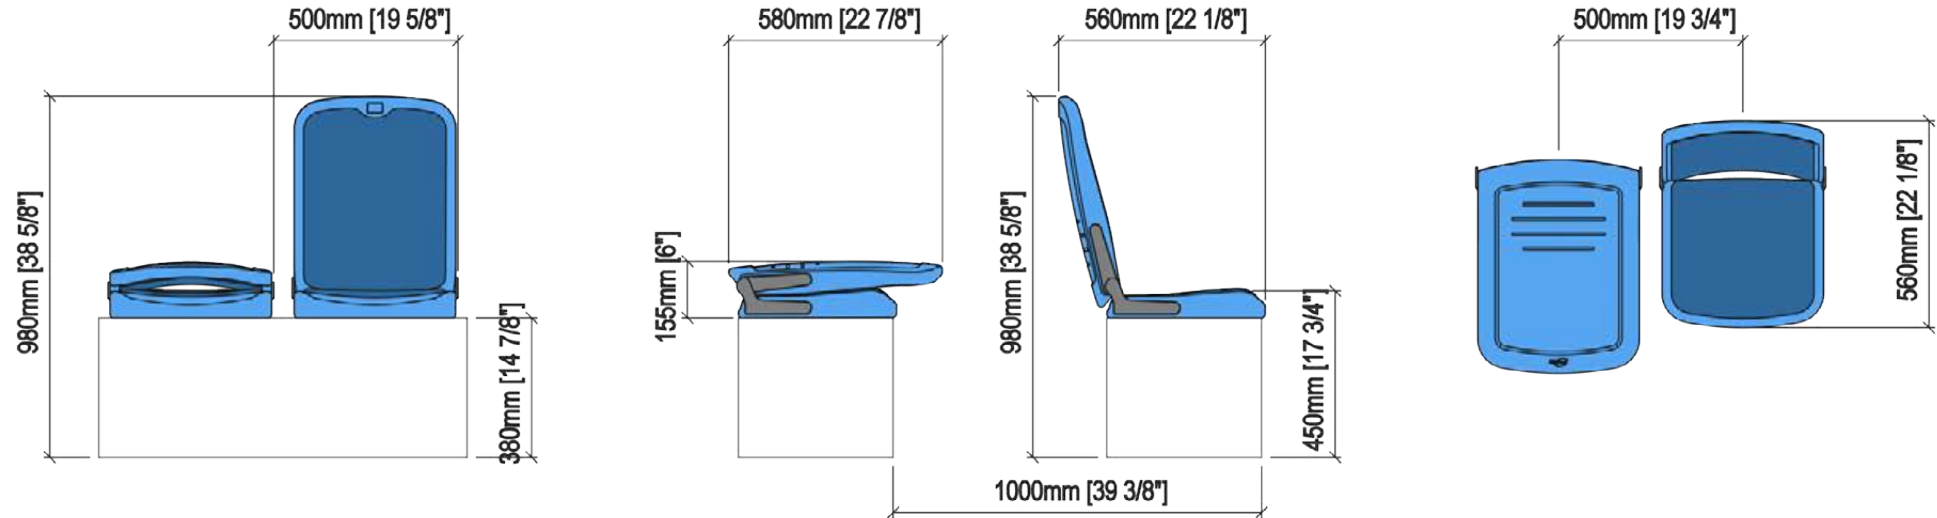

OPTIONS

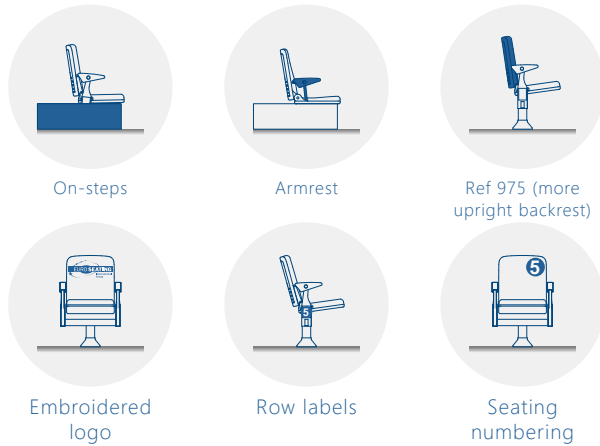

CERTIFICATES

	Fabric	Fire Barrier	Foam	Plastic
BS 5852:2006	●			
BS-EN 1021-1:2006	●			
CAL TB 117-2013, SECTION 1	●			
UNE 23.727-90 1R (M1)	●	●		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●	
BS 5852:1979 Parte 1		●		
UNE 23.727-90 1R (M2 / M3) Opcional				●



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev