

# MOZART PL

## Millenium Series



## TECHNICAL SPECIFICATIONS

**Dimensions:** 54 - 56 cm seat centres  
54.5 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover and everything is protected by a varnished solid wood cover. Polyurethane density 55 Kg/m<sup>3</sup>

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>

**Side Panel:** Texturized injected polypropylene, 60mm Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concelaed floor fixation system.

**Armrest:** Round-shaped varnished solid wood.


**Volume:** 0.13 m<sup>3</sup> / unit

**Weight:** 17.90 Kg not assembled


# MOZART PL

## Millenium Series


### DRAWING

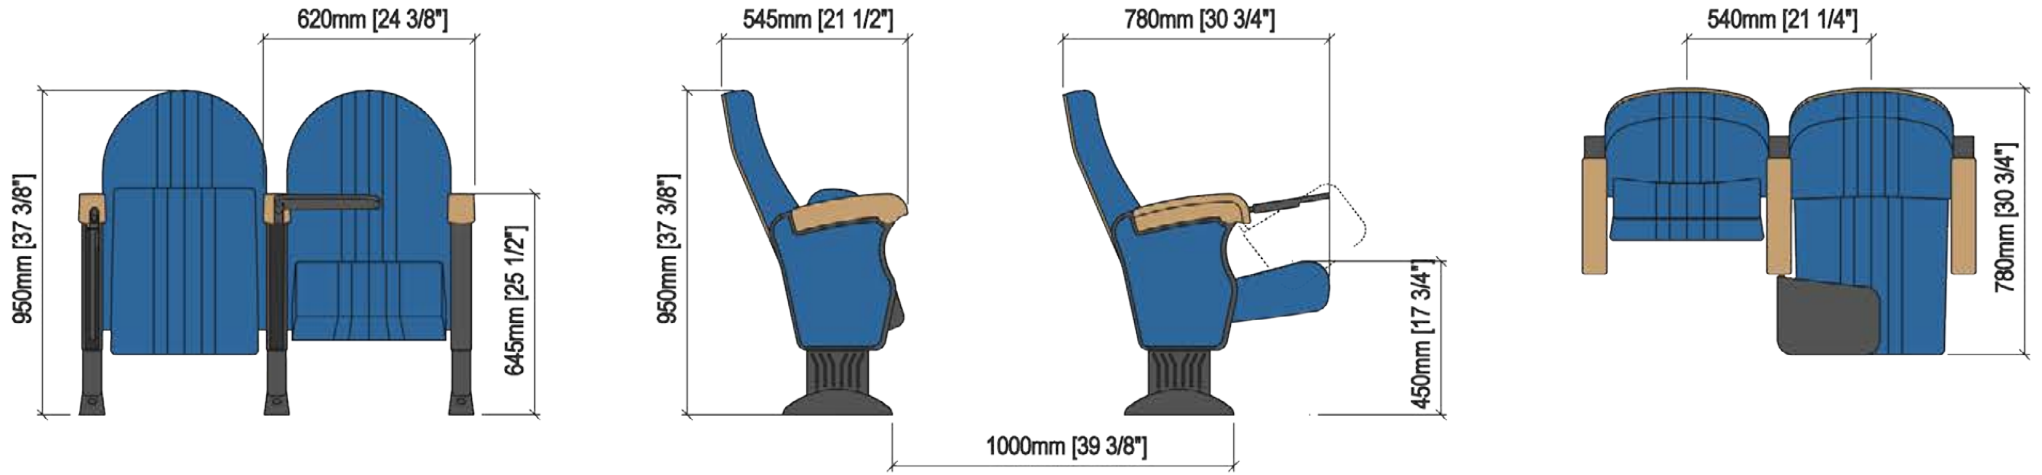


### OPTIONS




Fixation to the floor




Slope




Movable seat



Ref 975 (more upright backrest)




Embroidered logo



Row labels



Seating numbering




Wood finish

### CERTIFICATES

BS 5852:2006  
 BS-EN 1021-1:2006  
 CAL TB 117-2013, SECTION 1  
 UNE 23.727-90 1R (M1)  
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
 BS 5852:1979 Parte 1  
 COEFICIENTE DE ABSORCIÓN ACÚSTICA

Fabric	Fire Barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	
	●		
			●



 [www.venueseating.dk](http://www.venueseating.dk)

 [info@venueseating.dk](mailto:info@venueseating.dk)

 + 45 70236923



Venue Seating ApS  
Lykkesholms Alle 7 B, 3 sal  
1902 Frederiksberg C  
Showroom: Smedeholm 11, 2730 Herlev