

OTELO

Millenium Series

TECHNICAL SPECIFICATIONS



Dimensions: 52 - 54 cm seat centres
56 cm depth
95 cm height

Backres: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover and everything is protected by a varnished solid wood cover. Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³

Side Panel: Texturized injected polypropylene, 40mm
End row panels completely upholstered.
Concealed floor fixation system.

Armrest: Texturized injected polypropylene, 40mm
End row panels completely upholstered.
Concealed floor fixation system.


Volume: 0.12 m³ / unit

Weight: 17.50 Kg not assembled


OTELO

Millenium Series

DRAWING

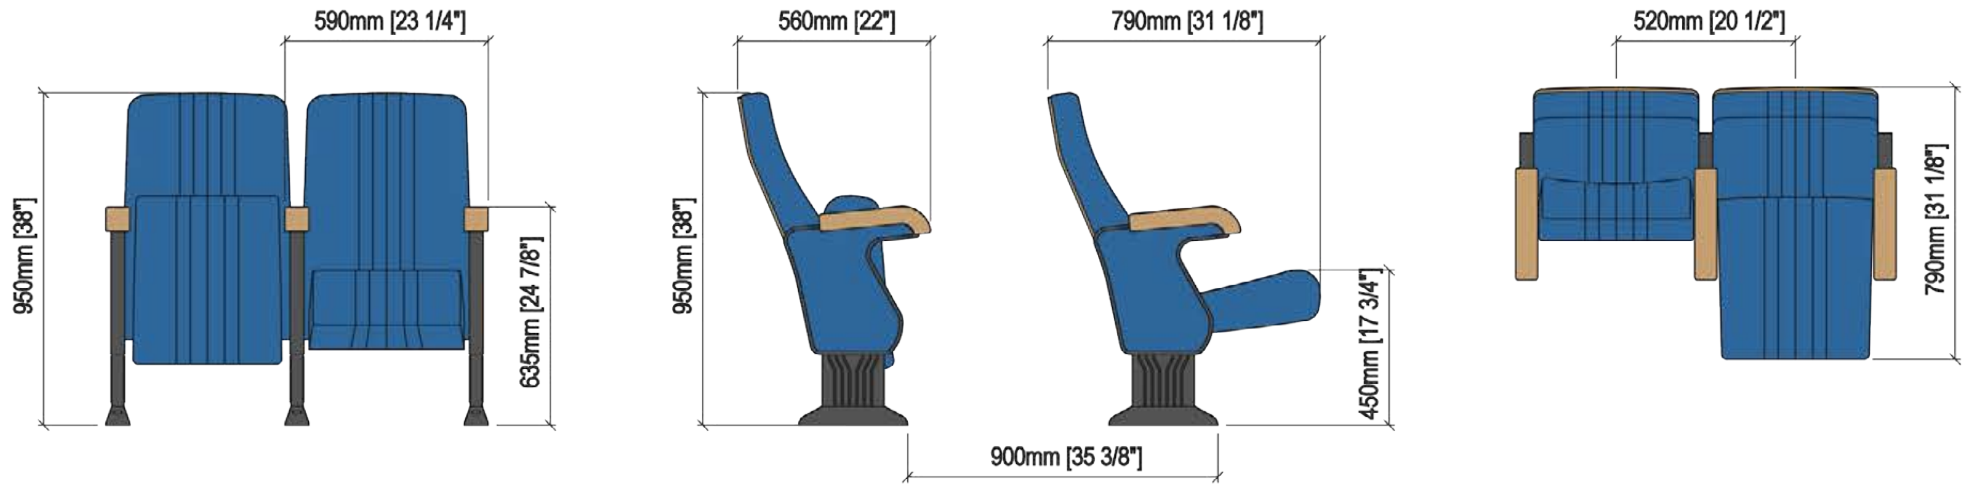

OPTIONS

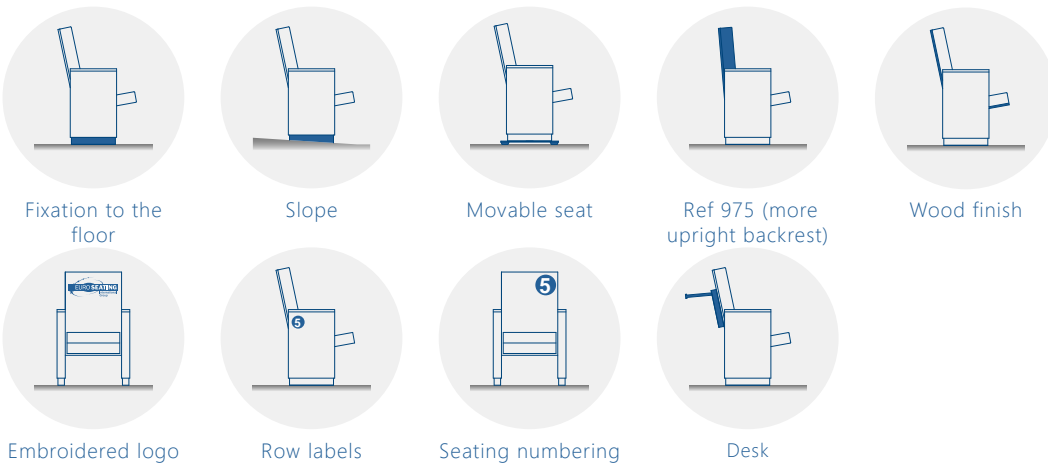


CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1
- COEFICIENTE DE ABSORCIÓN ACÚSTICA

Fabric	Fire Barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	
	●		
			●



 www.venueseating.dk

 info@venueseating.dk

 + 45 70236923



Venue Seating ApS
Lykkesholms Alle 7 B, 3 sal
1902 Frederiksberg C
Showroom: Smedeholm 11, 2730 Herlev